









POLYMIDE HIGH CLASS WATER HOOKER ELBOWS


PRODUCT CODE: NP2582

SIZE: 8 x 450mm

WARRANTY: 15 years

WATERMARK:  Licence No WMKA21165

-  Max. operating temperature
70°C
-  Max. temperature
90°C
-  Max. working pressure
10 bar – 1000 kpa
-  Burst pressure
>150 bar – 15000 kpa
-  Tensile strength
>1400 N – 140 kg
-  Bending radius
30mm – 1.2"
-  Outer diameter (braided) max.
11mm – 0.43"
-  Flow rate (300mm, 3 bar, open atmosphere)
28 L/min – 7.4 gpm

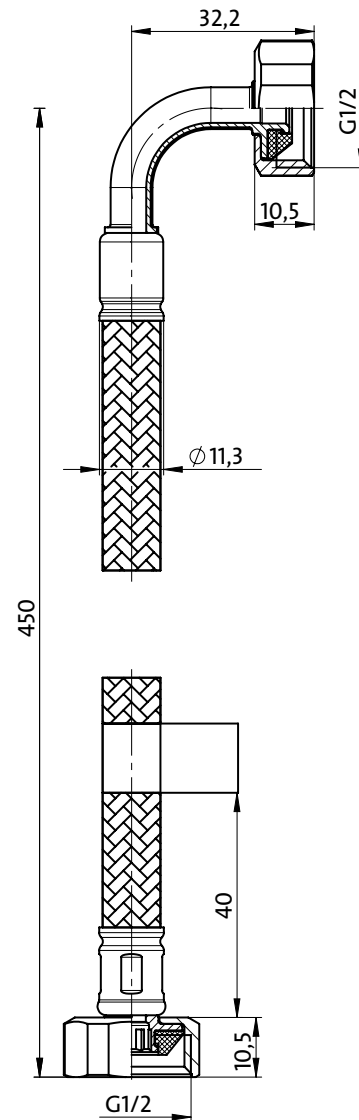


BRAIDING OPTION:



PA (polyimide)

INLET CONNECTION:



1/2"

OUTLET CONNECTION:



M10x1 2 o-rings